



SERIES RAZOR

LED ULTRA THIN RECESSED DOWNLIGHT

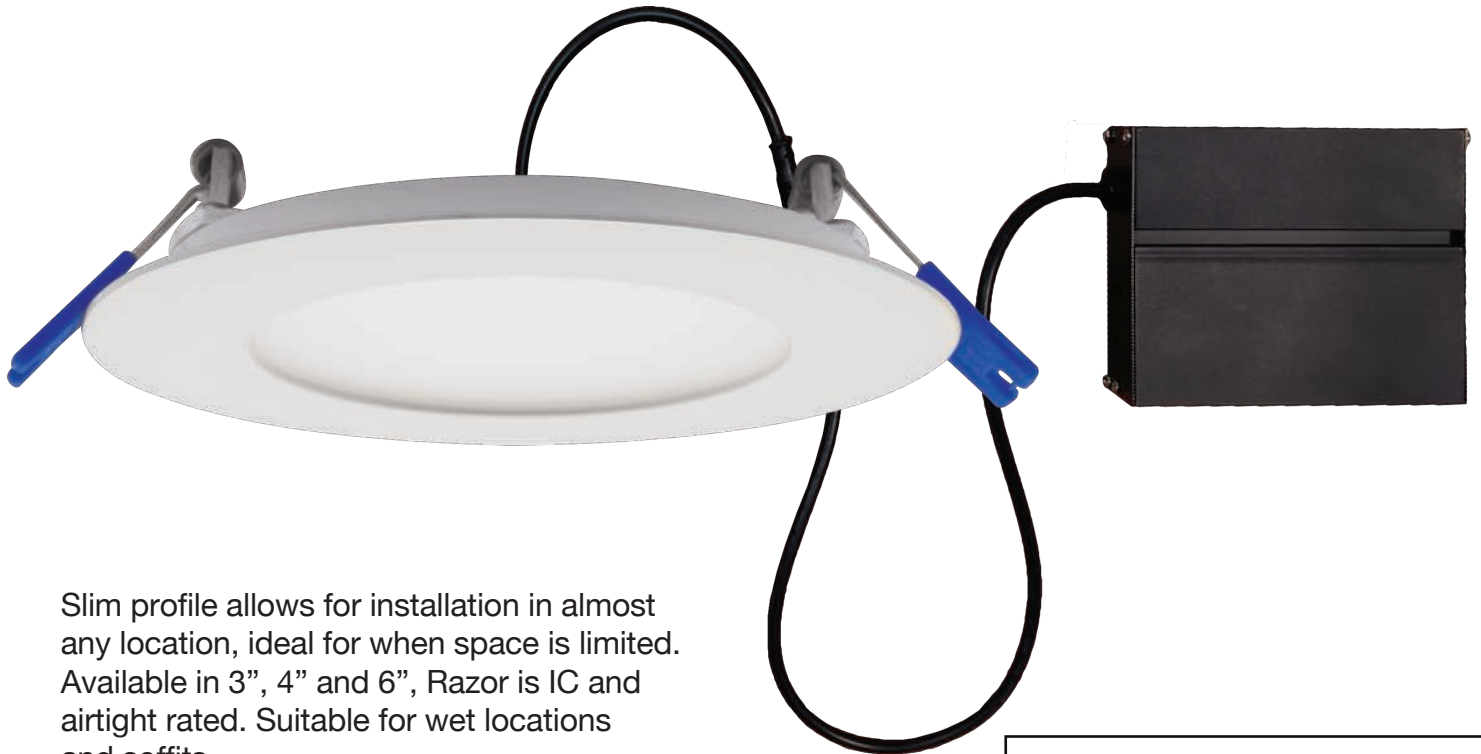

Slim profile allows for installation in almost any location, ideal for when space is limited. Available in 3", 4" and 6", Razor is IC and airtight rated. Suitable for wet locations and soffits.

Each unit includes a junction box with driver, pressure fit spring clips and Quick Connect wire connectors for fast and easy installation.

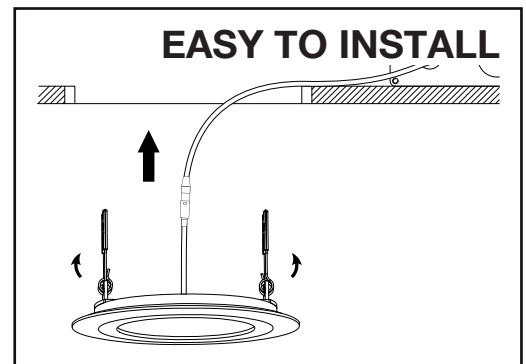


5 years Limited Warranty

NOMINAL SIZE	MODEL	LIGHT OUTPUT	WATTAGE	LUMINAIRE DIMENSIONS	JUNCTION BOX DIMENSIONS	COLOR TEMPERATURE	CRI
3"	RZR-300	420 LM	6W	3.75"	3.5" x 2.9" x 1.2"	3000K, 4000K	80+
4"	RZR-400	600 LM	9W	5.0"	3.5" x 3.25" x 1.2"		
6"	RZR-600	950 LM	12W	7.0"			
LIFETIME 50,000 HOURS		LIGHT DISTRIBUTION BEAM ANGLE 107°		AVAILABLE FINISHES WHITE, SATIN CHROME, BLACK			


RAZOR-R

SERIES **LED**
LOW PROFILE REGRESSED
RECESSED DOWNLIGHT

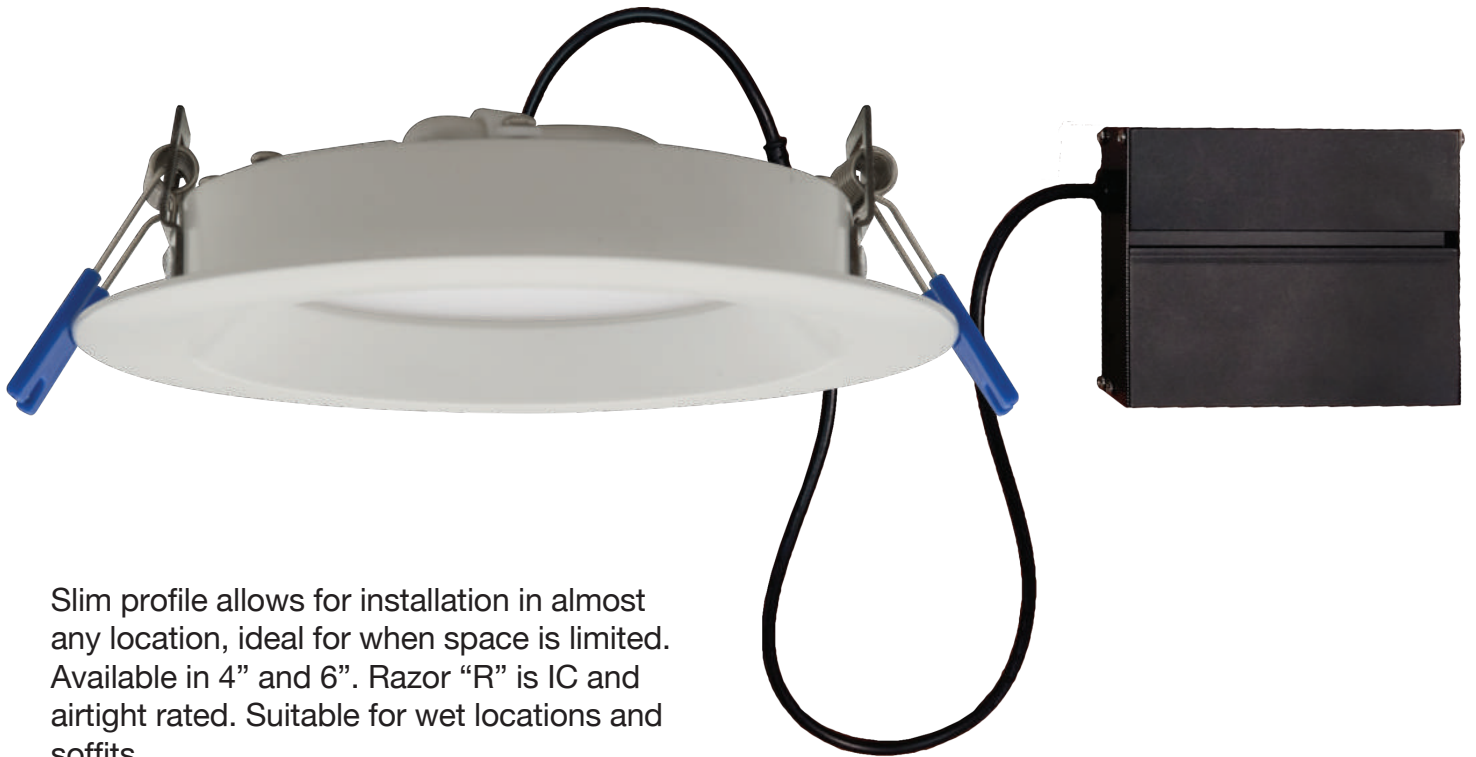

Slim profile allows for installation in almost any location, ideal for when space is limited. Available in 4" and 6". Razor "R" is IC and airtight rated. Suitable for wet locations and soffits.

Each unit includes a junction box with driver, pressure fit spring clips and Quick Connect wire connectors for fast and easy installation.

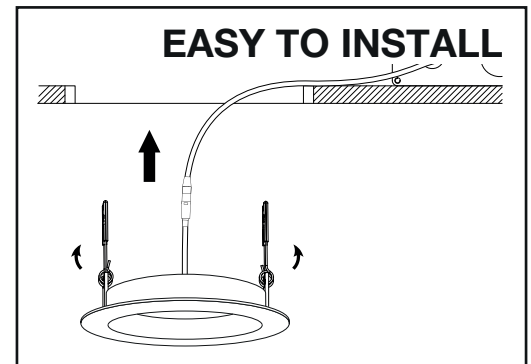

5 years Limited Warranty

NOMINAL SIZE	MODEL	LIGHT OUTPUT	WATTAGE	LUMINAIRE DIMENSIONS	JUNCTION BOX DIMENSIONS	COLOR TEMPERATURE	CRI
4"	RZR-410	600 LM	9W	5.4"	3.5" x 3.25" x 1.2"	3000K, 4000K	80+
6"	RZR-610	950 LM	12W	7.3"			
LIFETIME 50,000 HOURS		LIGHT DISTRIBUTION BEAM ANGLE 107°		AVAILABLE FINISHES WHITE, SATIN CHROME, BLACK			

SERIES

LED


RAZOR-G

LOW PROFILE GIMBAL RECESSED DOWNLIGHT



Slim profile allows for installation in almost any location, ideal for when space is limited. Available in 4". Razor "G" is IC and airtight rated. Suitable for damp locations and soffits.

Each unit includes a junction box with driver, pressure fit spring clips and Quick Connect wire connectors for fast and easy installation.

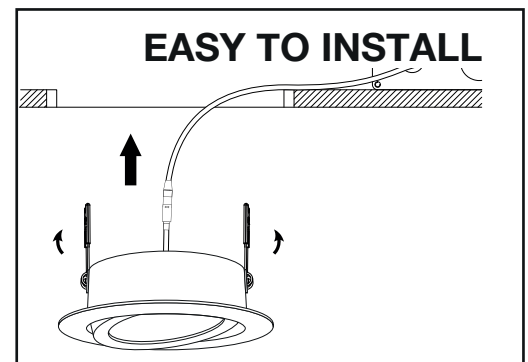

5 years Limited Warranty

NOMINAL SIZE	MODEL	LIGHT OUTPUT	WATTAGE	LUMINAIRE DIMENSIONS	JUNCTION BOX DIMENSIONS	COLOR TEMPERATURE	CRI
4"	RZR-420	600 LM	9W	5.75"	3.5" x 3.25" x 1.2"	3000K, 4000K	80+
LIFETIME 50,000 HOURS		LIGHT DISTRIBUTION BEAM ANGLE 107°		AVAILABLE FINISHES WHITE, SATIN CHROME, BLACK			