



**MOUNTING INSTRUCTIONS USING POWER CORD**

SELECT A SUITABLE LOCATION FOR INSTALLATION BY KEEPING IN MIND THAT A POWER CORD WITH PLUG MUST REACH THE NEAREST ELECTRICAL OUTLET .DO NOT INSTALL THE FIXTURE WHILE IT IS PLUGGED INTO AN ELECTRICAL OUTLET. FOR INDOOR INSTALLATION ONLY.


1. Swivel the light head to allow you to see the keyhole slots.




2. While holding the fixture up against the mounting surface, use a pencil to mark the locations of the keyhole slots onto the mounting surface.





3. Drill a 1/16" pilot hole into the marked screw location. Start in the screw but before tightening the unit, slide it until the narrow end of the keyhole is under the screw.




4. Using a screwdriver, pry off the input cap that covers the input receptacle in order to insert power cord.



5. Optionnally units can be installed end to end using joiner accessories. Such as the joiner or the 6" connecting cable included. A 24" or a 48" connecting cable is sold separately if needed.

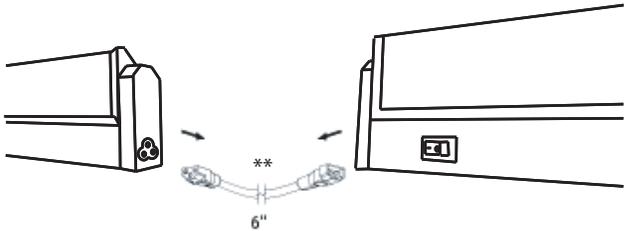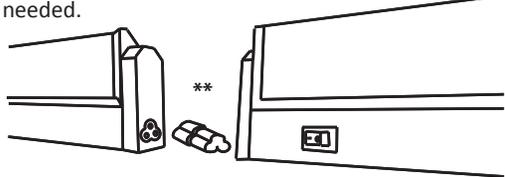

6. Connect power cord with plug into the receptacle nearest to the power source. Switch your under cabinet fixture to ON and your light fixture is now functional.




2044 autoroute 440, Laval, Québec H7S 2M9  
T: 1-800-776-7891 / 450-686-0770 F: 1-800-309-9401  
[www.ndrelectric.com](http://www.ndrelectric.com)

**MODEL # UNT5 / UNL / UNX**

**HARDWIRE INSTRUCTIONS**

IF YOUR FIXTURE IS TO BE DIRECT WIRED DO NOT REMOVE PLASTIC RECEPTACLE ON EACH END OF THE UNIT. BEFORE YOU START INSTALLATION MAKE SURE THE POWER IS OFF.

1. Turn the unit backwards and locate the removable plate. Easily remove plate using a screw driver or similar tool.

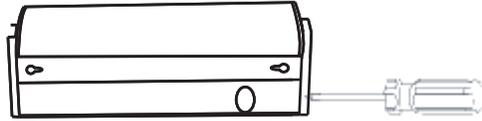


2. Once you have determined the mounting location, mark the corresponding knock-out closest multi-wire end and remove it. You can remove the knock-out by twisting it with a flathead screwdriver, this should be done carefully to avoid damaging the unit.



3. Attach a wire coupling by inserting the threaded end (from outside the fixture) through the knock-out. Secure the wire coupling to the fixtures chassis by tightening the fastener. Allow enough wire length to make the connection.



4. Inside the wire compartment are 2 lead wires as well as a green ground wire.

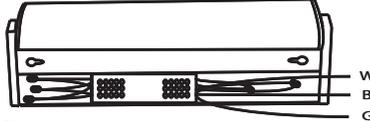

5. Start by removing the wire connectors. Connect white wire from fixture to white wire and black wire with black wire.

6. For Safety and proper operation your fixture must be properly grounded. If you are unfamiliar with the method of properly grounded your fixture consult a qualified electrician.


7. To re-attach the wire compartment cover, simply place back into its proper place.

8. Your installation is now complete, restore power and switch unit to ON position.

**Using junction box**

1. Repeat step # 1 and #2 shown above

2. Connect power source (wires) to junction box.

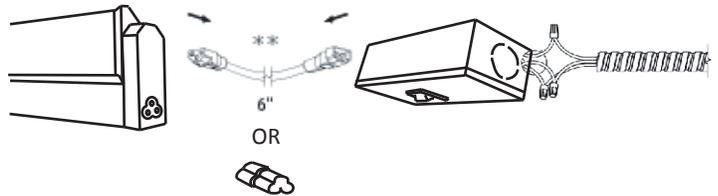

3. Connect under cabinet fixture to the junction box using the joiner or any size connecting cable.

**WARRANTY**

The warranty applies to the product from the original date of purchase for one (1) year against manufacturing defects. Therefore, the owner must provide a copy of the original dated proof of purchase. The bulbs provided are not covered by this warranty. Manufacturer's obligation under this warranty is limited to the cost of the components. It is not related in any way to the cost of the connection, the installation of the replacement parts and cost of transport. For all claims, please contact our customer services dept. T: 1-800-776-7891 or email us at [info@ndrelectric.com](mailto:info@ndrelectric.com)