


2044 autoroute 440, Laval, Québec H7S 2M9
T: 1-800-776-7891 / 450-686-0770 F: 1-800-309-9401
www.ndrelectric.com

1. Turn the unit backwards and locate the removable plate. Easily remove plate using a screw driver or similar tool.




2. Once you have determined the mounting location, mark the corresponding knock-out closest multi-wire end and remove it. You can remove the knock-out by twisting it with a flathead screwdriver, this should be done carefully to avoid damaging the unit.

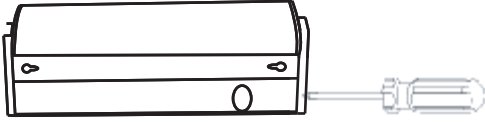

3. Attach a wire coupling by inserting the threaded end (from outside the fixture) through the knock-out. Secure the wire coupling to the fixtures chassis by tightening the fastener. Allow enough wire length to make the connection.



4. Inside the wire compartment are 2 lead wires as well as a green ground wire.

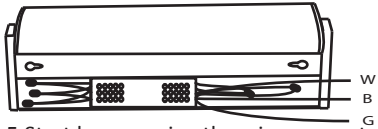

5. Start by removing the wire connectors. Connect white wire from fixture to white wire and black wire with black wire.

6. For Safety and proper operation your fixture must be properly grounded. If you are unfamiliar with the method of properly grounded your fixture consult a qualified electrician.


7. To re-attach the wire compartment cover, simply place back into its proper place.

8. Your installation is now complete, restore power and switch unit to ON position.

9. Swivel the light head to allow you to see the keyhole slots.



10. While holding the fixture up against the mounting surface, use a pencil to mark the locations of the keyhole slots onto the mounting surface.

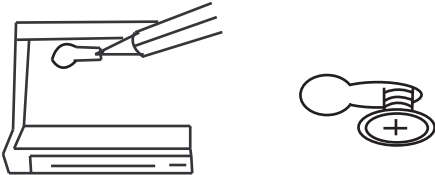


WARRANTY

The warranty applies to the product from the original date of purchase for one (1) year against manufacturing defects. Therefore, the owner must provide a copy of the original dated proof of purchase. The bulbs provided are not covered by this warranty. Manufacturer's obligation under this warranty is limited to the cost of the components. It is not related in any way to the cost of the connection, the installation of the replacement parts and cost of transport. For all claims, please contact our customer services dept. T: 1-800-776-7891 or email us at info@ndrelectric.com



FOR HARDWIRE APPLICATION ONLY

1. Retourner le luminaire et situé la plaque amovible. En utilisant un tournevis ou un appareil similaire enlever la plaque amovible.

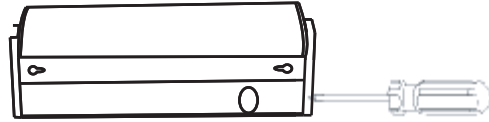


2. Une fois que vous aurez déterminé la position dans laquelle le luminaire sera installé marquez l'endroit défonçable correspondant le plus près possible de l'extrémité à multiples fils isolé et défoncez le en utilisant un tournevis ou un marteau.



3. Attachez le coupleur de fils (non-inclu) en insérant l'extrémité filetée depuis l'extérieur du luminaire à travers la partie défoncée. Fixer le coupleur de fils au chassis du luminaire en serrant le mécanisme de fixation. (depuis l'intérieur).



4. À l'intérieur du compartiment 2 fils conducteur et un fil mise à terre.

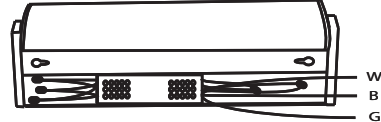

5. Commencer en retirant les connecteurs de fils. Connecter les fils blanc avec les fils blanc et les noirs avec les noirs.

6. Pour des raisons de sécurité et pour assurer un bon fonctionnement il faut que votre luminaire soit mis à la terre correctement. Si vous ne savez pas mettre votre luminaire à terre correctement consulter un électricien.

7. Pour remettre la plaque amovible simplement remettre par dessus le compartiment à fils et presser vers le bas.

8. L'installation est maintenant terminée, veuillez remettre le courant et allumer votre luminaire avec l'interrupteur.

9. Faire pivoter la tête de la lampe pour vous permettre de voir les fentes



10. Tout en tenant le luminaire en position de montage contre la surface de montage, utilisez un crayon pour marquer les emplacement des fentes.



La garantie s'applique sur le produits débutant à la date original de l'achat pour une durée de un (1) ans ou 365 jours sur tout dommages manufacturiers. Le propriétaire doit avoir une copie de sa facture ayant la date d'achat. Les ampoules incluses dans ce luminaire ne sont pas couvert par cette garantie. Les obligation du manufacturier sous cette garantie est limité au coût des composantes. Nous ne sommes pas responsable du coût de branchement, d'installation ni des remplacement des pièces et de leur transport. Pour toute réclamations, veuillez contracter notre département de services: NDR Électrique n'est pas responsable de tout dommages résultant d'une installation qui n'est pas conforme à l' Association Canadienne de standardisation (CSA) T: 1-800-776-7891 or email us at info@ndrelectric.com