



SERIES  
**RAZOR**

ULTRA THIN RECESSED DOWNLIGHT



RAZOR



RAZOR-R



RAZOR-G



RAZOR-S

# RAZOR


## RECESSED DOWNLIGHT SERIES BY NDR

The Razor series' ultra-slim design is perfect for any small space and allows for flexible installation, particularly in confined areas or when facing constraints such as beams, ceiling joists or air ducts.

Razor models come in a wide variety of shapes, finishes and color temperatures. They combine high lumen output with low power consumption and offer an elegant, contemporary look to residential and commercial indoor lighting.

### RATINGS AND CERTIFICATIONS

Airtight rated ASTM E283-04  
IC rated  
WET location rated except  
Razor-G model which is DAMP rated  
Fire rated FT4 wires (UL 2464)  
CSA certified for USA and Canada

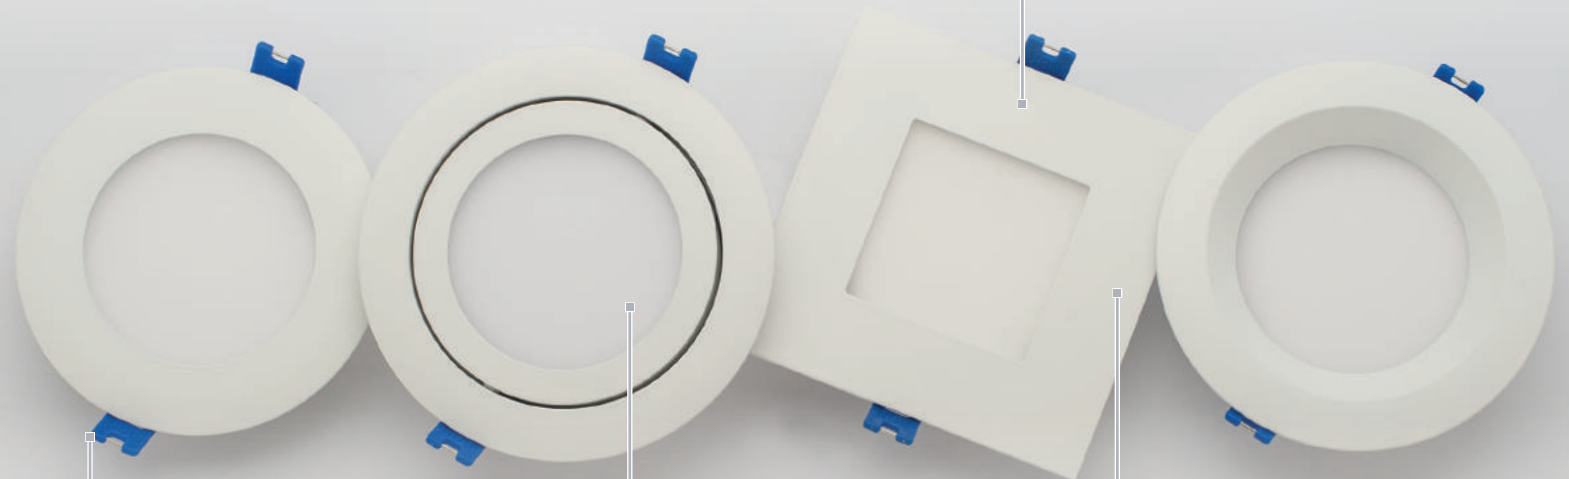

### 3 FINISHES

White, black and satin chrome

### 3 COLOR TEMPERATURES

2,700 K, 3,000 K and 4,000 K

### EASY INSTALLATION

Each unit includes a junction box with driver, pressure-fit spring clips and Quick Connect wire connectors for fast and easy installation

# RAZOR

## ULTRA THIN RECESSED DOWNLIGHT **LED**

The first model in the collection, this traditional style provides numerous design functions. Whether a home or commercial application, its superior brightness and low power usage offer the ideal lighting solution.

### SIZE & MODELS

**3"**

RZR-300-6W-3K-WH  
RZR-300-6W-3K-BLK  
RZR-300-6W-3K-SC  
RZR-300-6W-4K-WH  
RZR-300-6W-4K-BLK  
RZR-300-6W-4K-SC

**4"**

RZR-400-9W-27K-WH  
RZR-400-9W-3K-WH  
RZR-400-9W-3K-BLK  
RZR-400-9W-3K-SC  
RZR-400-9W-4K-WH  
RZR-400-9W-4K-BLK  
RZR-400-9W-4K-SC

**6"**

RZR-600-12W-27K-WH  
RZR-600-12W-3K-WH  
RZR-600-12W-3K-BLK  
RZR-600-12W-3K-SC  
RZR-600-12W-4K-WH  
RZR-600-12W-4K-BLK  
RZR-600-12W-4K-SC

### COLOR TEMPERATURE

**2,700 K | 3,000 K | 4,000 K**

### FINISH




WHITE



BLACK



SATIN CHROME

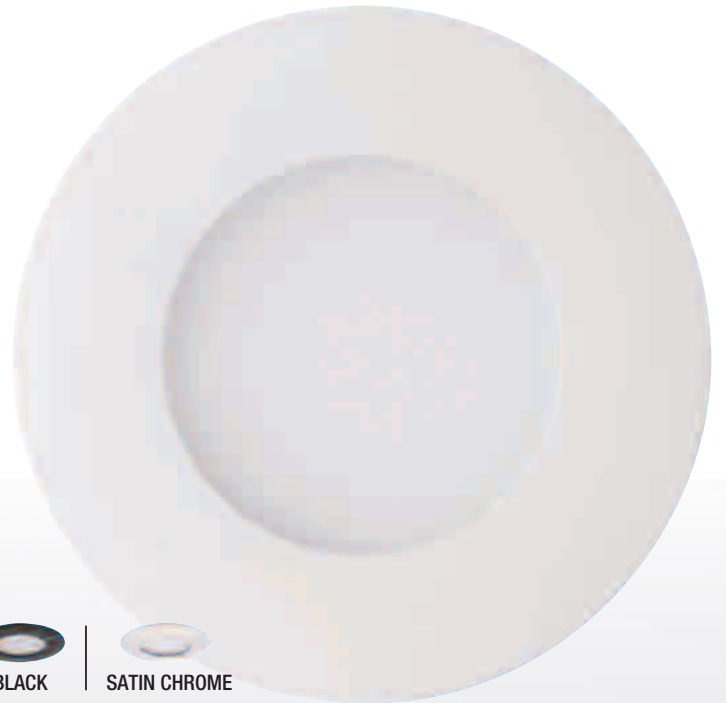

# RAZOR-R

## LED LOW PROFILE REGRESSED RECESSED DOWNLIGHT

The Razor-R series takes illumination to the next level, featuring a design and look that create a wash of light to flow throughout, with minimal hot spots on the ceiling.



### SIZE & MODELS

4"

6"

RZR-410-9W-3K-WH  
RZR-410-9W-3K-BLK  
RZR-410-9W-3K-SC  
RZR-410-9W-4K-WH  
RZR-410-9W-4K-BLK  
RZR-410-9W-4K-SC

RZR-610-12W-3K-WH  
RZR-610-12W-3K-BLK  
RZR-610-12W-3K-SC  
RZR-610-12W-4K-WH  
RZR-610-12W-4K-BLK  
RZR-610-12W-4K-SC

### FINISH



SATIN CHROME



BLACK



WHITE

### COLOR TEMPERATURE

3,000 K

4,000 K



WET  
LOCATIONS



DIMMABLE



# RAZOR·G

## LOW PROFILE GIMBAL RECESSED DOWNLIGHT **LED**

The Razor-G series improves on the original concept by being able to direct the light output where needed. This unit is perfect for highlighting specific needs, such as a sloped ceiling application.

### SIZE & MODELS

4"

RZR-420-9W-3K-WH  
RZR-420-9W-3K-BLK  
RZR-420-9W-3K-SC  
RZR-420-9W-4K-WH  
RZR-420-9W-4K-BLK  
RZR-420-9W-4K-SC

### COLOR TEMPERATURE

3,000 K | 4,000 K

### FINISH



# RAZOR-S

## LED ULTRA THIN RECESSED SQUARE DOWNLIGHT

The contemporary looking Razor-S series has all the benefits of the original Razor. The square design enables unlimited design applications, using cutting-edge installation techniques. All Razor-S units offer a round back feature, making hole cut-outs much easier and quicker than the standard square back versions.

### SIZE & MODELS

4"

6"

RZR-430-9W-3K-WH  
RZR-430-9W-3K-BLK  
RZR-430-9W-3K-SC  
RZR-430-9W-4K-WH  
RZR-430-9W-4K-BLK  
RZR-430-9W-4K-SC

RZR-630-12W-3K-WH  
RZR-630-12W-3K-BLK  
RZR-630-12W-3K-SC  
RZR-630-12W-4K-WH  
RZR-630-12W-4K-BLK  
RZR-630-12W-4K-SC

### FINISH

SATIN CHROME


BLACK

WHITE

### COLOR TEMPERATURE

3,000 K

4,000 K

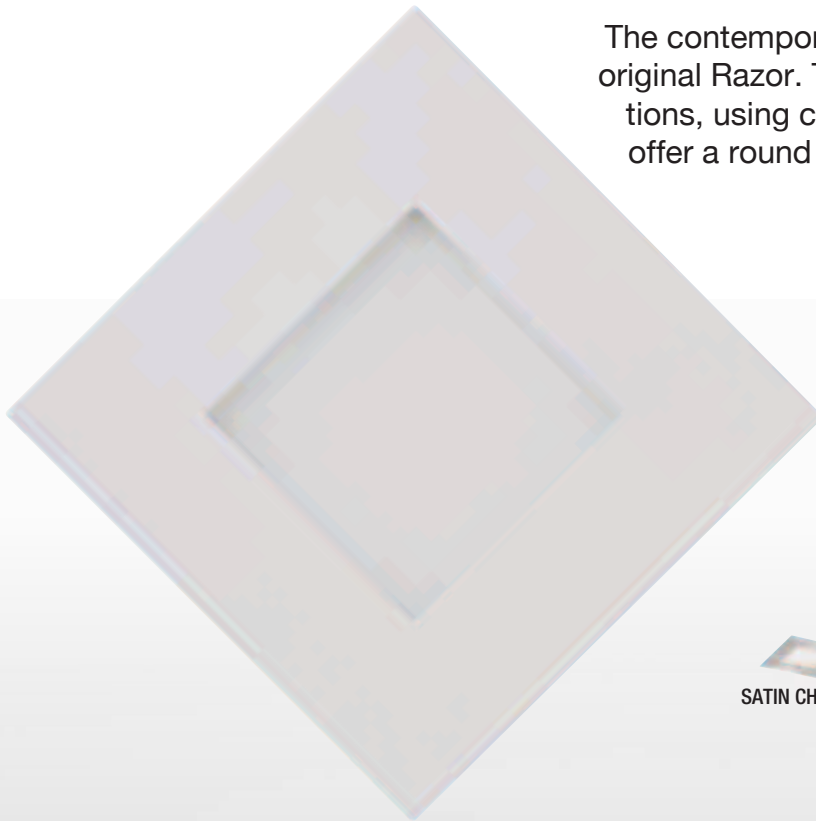


ROUND BACK



# COMPONENTS

## VERSATILE PARTS FOR EASY INSTALLATION

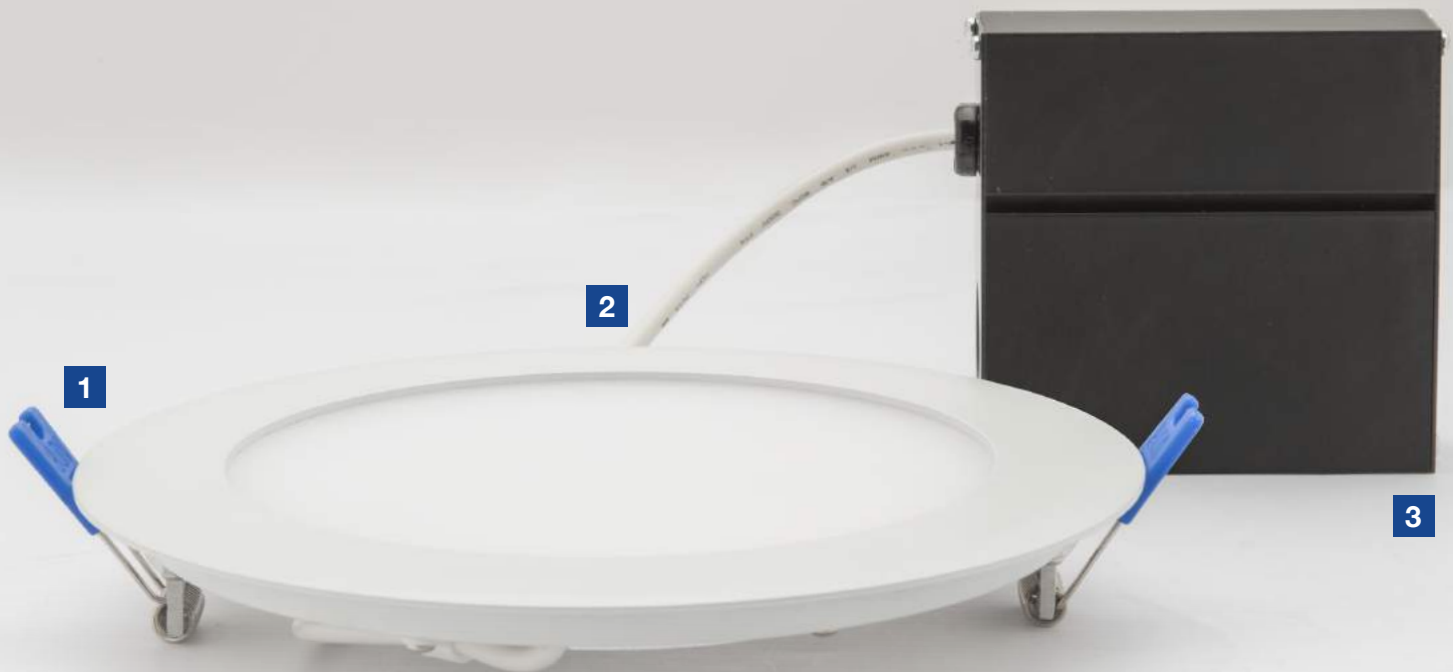

### 1 SPRING CLIPS AND FLANGES

- Heavy duty mounting clips are designed for sturdy installation and prevent springs from falling off during installation
- Large flange feature allows for compensation if hole cut-outs are done incorrectly



### 2 WIRE CONNECTORS

- Locking nut feature ensures light unit and junction box remain connected



### 3 JUNCTION BOX

- “Quick Connect” wire connectors for a quick wire connection





[www.ndrelectric.com](http://www.ndrelectric.com)

t. 514.695.8228 t.f. 1.855.739.8228 f. 514.695.9009  
166 Brunswick Boulevard, Montreal, Quebec H9R 5P9