

# RAZOR

#### **ULTRA THIN RECESSED DOWNLIGHT**





### RECESSED DOWNLIGHT SERIES BY NDR

The Razor series' ultra-slim design is perfect for any small space and allows for flexible installation, particularly in confined areas or when facing constraints such as beams, ceiling joists or air ducts.

Razor models come in a wide variety of shapes, finishes and color temperatures. They combine high lumen output with low power consumption and offer an elegant, contemporary look to residential and commercial indoor lighting.

#### **RATINGS AND CERTIFICATIONS**

Airtight rated ASTM E283-04 IC rated

WET location rated except Razor-G model which is DAMP rated Fire rated FT4 wires (UL 2464) CSA certified for USA and Canada



Each unit includes a junction box with driver, pressure-fit spring clips and Quick Connect wire connectors for fast and easy installation

#### **3 COLOR TEMPERATURES**

2,700 K, 3,000 K and 4,000 K



The first model in the collection, this traditional style provides numerous design functions. Whether a home or commercial application, its superior brightness and low power usage offer the ideal lighting solution.

#### SIZE & MODELS

3"

450 lumens

RZR-300-6W-3K-WH RZR-300-6W-3K-BLK RZR-300-6W-3K-SC RZR-300-6W-4K-WH RZR-300-6W-4K-BLK RZR-300-6W-4K-SC

4"

600 lumens

RZR-400-9W-27K-WH RZR-400-9W-3K-WH RZR-400-9W-3K-BLK RZR-400-9W-3K-SC RZR-400-9W-4K-WH RZR-400-9W-4K-BLK RZR-400-9W-4K-SC

780 lumens

RZR-500-11W-3K-WH RZR-500-11W-3K-BLK RZR-500-11W-3K-SC RZR-500-11W-4K-WH RZR-500-11W-4K-BLK RZR-500-11W-4K-SC

6"

950 lumens

RZR-600-12W-27K-WH RZR-600-12W-3K-WH RZR-600-12W-3K-BLK RZR-600-12W-3K-SC RZR-600-12W-4K-WH RZR-600-12W-4K-BLK RZR-600-12W-4K-SC

**COLOR TEMPERATURE** 

2,700 K 3,000 K 4,000 K

**FINISH** 















# RAZOR-R

# **LED** LOW PROFILE REGRESSED RECESSED DOWNLIGHT











# RAZOR-G

### LOW PROFILE GIMBAL RECESSED DOWNLIGHT LED

The Razor-G series improves on the original concept by being able to direct the light output where needed. This unit is perfect for highlighting specific needs, such as a sloped ceiling application.

#### SIZE & MODELS

4"

#### 600 lumens

RZR-420-9W-3K-WH RZR-420-9W-3K-BLK RZR-420-9W-3K-SC RZR-420-9W-4K-WH RZR-420-9W-4K-BLK RZR-420-9W-4K-SC

**COLOR TEMPERATURE** 

3,000 K | 4,000 K |

#### **FINISH**


















# RAZOR-S

## **LED ULTRA THIN RECESSED SQUARE DOWNLIGHT**

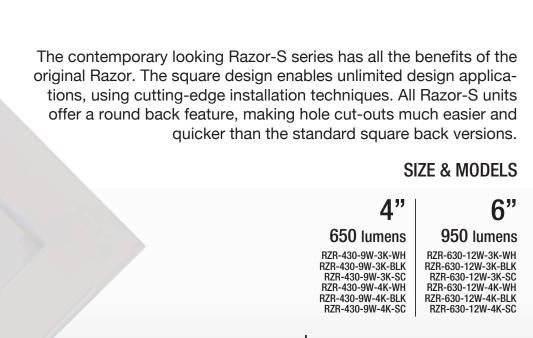

**FINISH** 

SATIN CHROME





**COLOR TEMPERATURE** 

3,000 K 4,000 K



**ROUND BACK** 









# COMPONENTS

### VERSATILE PARTS FOR EASY INSTALLATION



#### 1 SPRING CLIPS AND FLANGES

- Heavy duty mounting clips are designed for sturdy installation and prevent springs from falling off during installation
- Large flange feature allows for compensation if hole cut-outs are done incorrectly



#### 2 WIRE CONNECTORS

 Locking nut feature ensures light unit and junction box remain connected



#### 3 JUNCTION BOX

"Quick Connect" wire connectors for a quick wire connection





### www.ndrelectric.com

t. 514.695.8228 t.f. 1.855.739.8228 f. 514.695.9009 166 Brunswick Boulevard, Montreal, Quebec H9R 5P9