

SERIES LED EDGE HIGH PERFORMANCE RECESSED DOWNLIGHT

HIGH PERFORMANCE LED

Integrated COB technology offers low-energy, long lasting performance with outstanding light outputs of 1000+ lumens.


PRESSURE-FIT CLIP SYSTEM

Pressure-fit spring clips for ease of install.



DIRECTIONAL GIMBAL

Standard 38-degree reflector and optic lens set in a convenient pivoting gimbal for optimal light adjustment. Custom 24-degree reflector and Solite lens options also available.

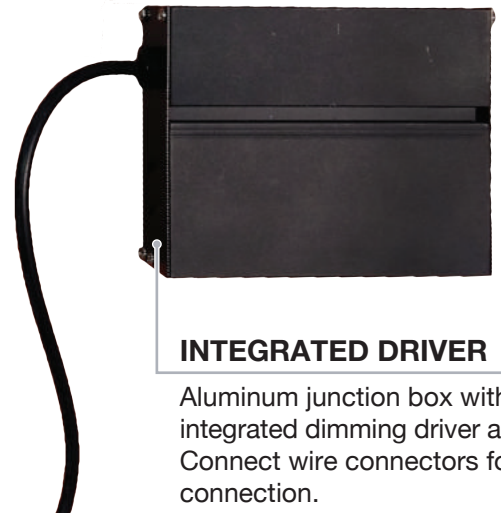

INTEGRATED DRIVER

Aluminum junction box with integrated dimming driver and Quick Connect wire connectors for easy connection.

DIE-CAST BODY

Die-cast aluminum construction in 4" or 5" trim sizes. Available in three finish options: white, black, and silver.



* Listed lumens reflect the standard model combination of 38 degree reflector with optic lens
 ** Optional: 277 V or 347 V (available only for 5")
 ** Lumen increase indicated is approximate and varies with lens option
 IC convertible with ceiling box (sold separately)
 5 years Limited Warranty

NOMINAL SIZE	MODEL	LIGHT OUTPUT*	WATTAGE VOLTAGE	LUMINAIRE DIMENSIONS	JUNCTION BOX DIMENSIONS	COLOR TEMPERATURE	CRI
4"	EG-400	1050 LM	12W/120 V	4.5" x 3.9"	6" x 3.5" x 1.5"	3000K, 4000K	80+
5"	EG-500	1800 LM	20W/120 V**	5.3" x 4.7"	6.75" x 3.5" x 1.5"		
LIFETIME		LENS OPTIONS		REFLECTOR OPTIONS		AVAILABLE FINISHES	
36,000 HOURS		OPTIC (STANDARD), SOLITE®		38° (STANDARD), 24° (+10% LM***)		WHITE, BLACK, SILVER	