

RETRO-B

4" Retrofit Stepped Baffle Recessed Downlight

RZR-RETRO-444

SPECIFICATION SHEET



SPECIFICATIONS



Light Unit

Aluminum Die cast with heat-treated powder coat paint preventing discoloring and rusting.

Optics

Integrated LED technology uses light guided reflector to distribute light and optimize high level of delivered lumens.

Electrical & Phase Control

Easily connected to a 120V power supply via provided E26 medium base socket adaptor. Dimming down to 10% with most standard LED dimmers (see list of approved dimmers). Ambient operating temperature: -40°C (-40°F) to +40°C (+104°F). IC, WET Location, AIR-TIGHT, T24-JA8, T20 rated. Phase Control: Forward Phase. Certifications: This product is ETL listed in USA & Canada, certified to UL standard 1598 and CSA standard C22.2 No. 250.0-08

Wiring


12" wire lead with connectors and E26 medium base socket adaptor and GU10 Halogen adaptor.

Installation

Ideal for renovation work where the 4" traditional recessed housings are already installed. Medium Base socket adaptor with 12" wire lead connects the integrated LED fixture directly to the socket (no additional wiring required). Pressure-fit spring steel clips to hold in most 4"-4.5" housings.

Selectable color temperature	27K/3K/35K/4K/5K
Lumen output	810 lumens
Beam angle	107°
CRI	90
Wattage	9.5 watts
Dimmable	Yes
LED life	50,000 hours
Warranty	5 years

DIMENSIONS

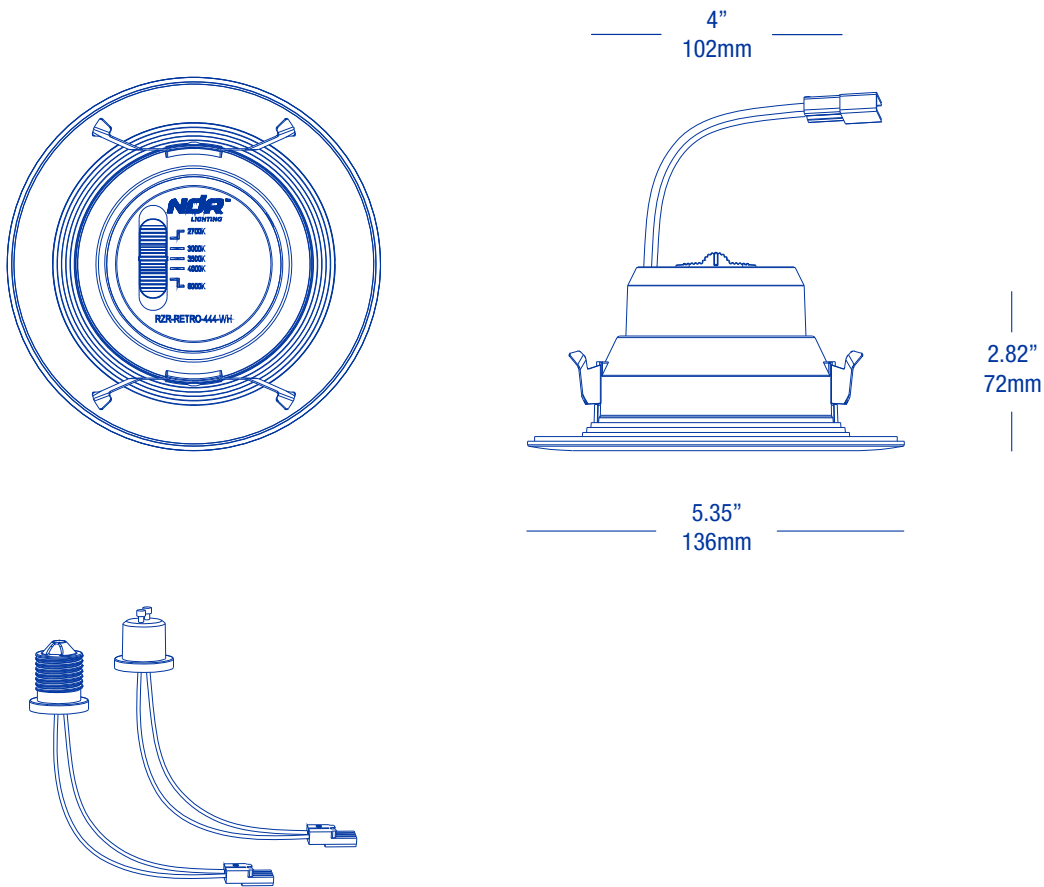

APPLICATIONS

This latest CCT (Correlated Color Temperature) technology is offered in a retrofit design. It features (5) color temperatures 27K, 3K, 35K, 4K & 5K to select from. The color temperature selector is located on the light unit, which allows for color selection to be made at final install stage. The Razor Retrofit is designed to replicate the look and quality of the flat Razor 400 model to make it convenient for use when the installation plan requires a mixture of old cans and new holes to be cut. It is also a beautiful fixture on it's own when replacing old traditional 6" trims and bulbs when using the existing 4" housings.

RATINGS & CERTIFICATIONS



Dimmable



Wet locations
rated



Airtight
rated



IC rated



ORDERING GUIDE

Series	Color Temperature	CRI	Wattage	Finish
RZR-RETRO-444	CCT 2700K/3000K/3500K/4000K/5000K	90	9.5W	WH White
RZR-RETRO-444	CCT 2700K/3000K/3500K/4000K/5000K	90	9.5W	BK Black

Note: Configure product using **BOLD** options. Ex.: **RZR-RETRO-444-WH**