


# ANNAPOLIS


MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS1200LED	3800 LM	35 W	5 K	80	100,000 HOURS

## OS1200LED FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	1236.32lx
2m	309.08lx
3m	137.37lx
4m	77.27lx
5m	49.45lx
6m	34.34lx
7m	25.23lx
8m	19.32lx
9m	15.26lx
10m	12.36lx
11m	10.22lx
12m	8.59lx

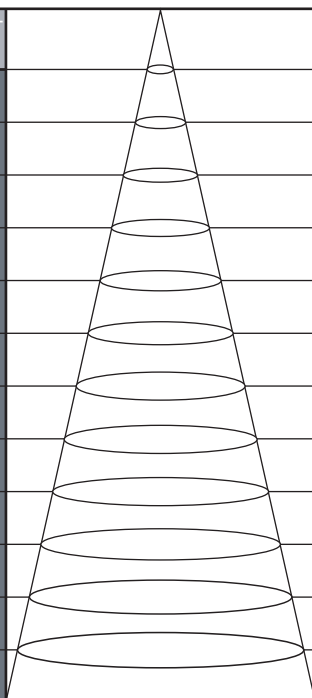

## OS1200LED LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

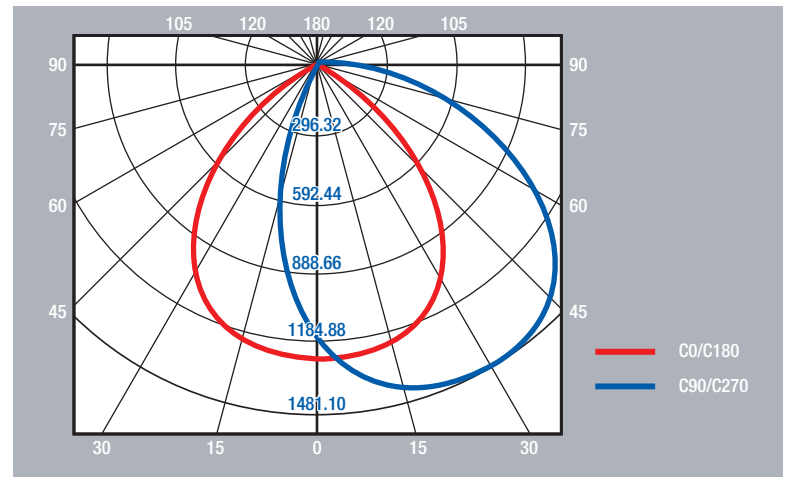

## OS1200LED ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	928.7	24.2
0-40	1488.1	38.8
0-60	2607.6	68
0-90	3717.4	97
90-180	116.1	3

## OS1200LED ISO ILLUMINANCE DIAGRAM (UNIT: LX)

