


ANNAPOLIS

MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS1300LED	5500 LM	47 W	5 K	80	100,000 HOURS

OS1300LED FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	1760.66lx
2m	440.17lx
3m	195.63lx
4m	110.04lx
5m	70.43lx
6m	48.91lx
7m	35.93lx
8m	27.51lx
9m	21.74lx
10m	17.61lx
11m	14.55lx
12m	12.23lx

OS1300LED LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

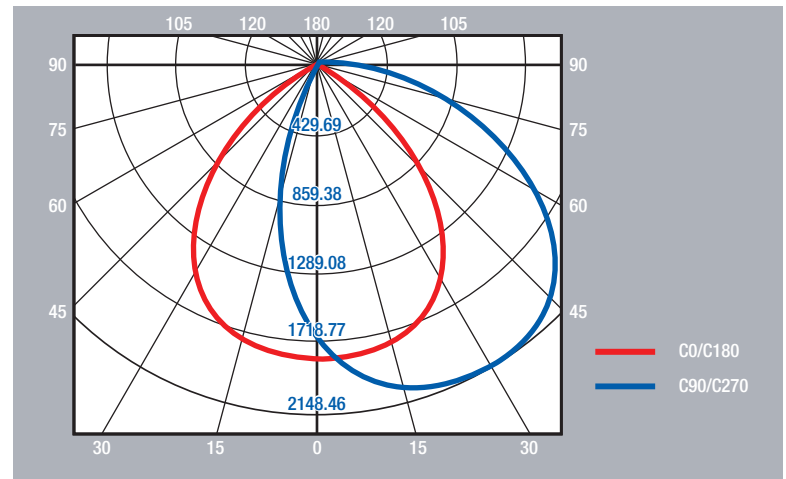

OS1300LED ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	1318.7	23.8
0-40	2113.6	38.1
0-60	3723.5	67.1
0-90	5359.5	96.6
90-180	189.2	3.4

OS1300LED ISO ILLUMINANCE DIAGRAM (UNIT: LX)

