


SEAWOLF


MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS1400LED-CWP	2700LM	27 W	5 K	80	100,000 HOURS

OS1400LED FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	824.28lx
2m	206.07lx
3m	91.59lx
4m	51.52lx
5m	32.97lx
6m	22.90lx
7m	16.82lx
8m	12.88lx
9m	10.18lx
10m	8.24lx
11m	6.81lx
12m	5.72lx

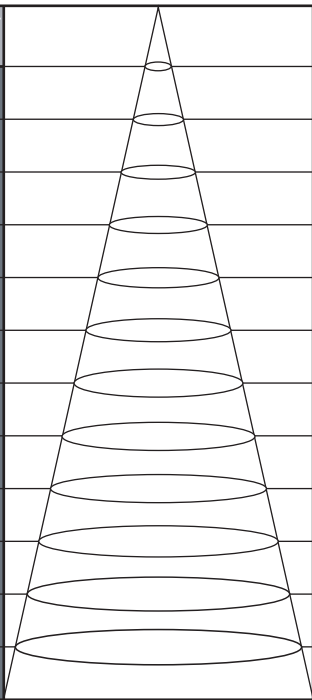

OS1400LED LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

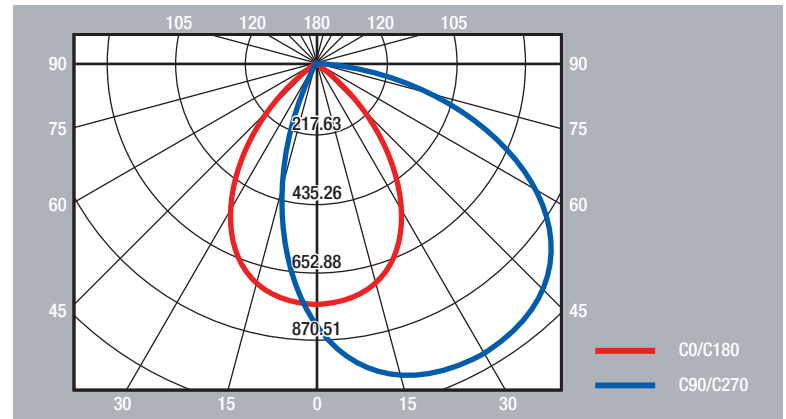

OS1400LED ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	590.3	21.5
0-40	958.4	34.9
0-60	1610.9	58.6
0-90	2405.6	87.5
90-180	343.2	12.5

OS1400LED ISO ILLUMINANCE DIAGRAM (UNIT: LX)

