


SEAWOLF

MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS1400LED-347V	2700LM	28 W	5 K	80	100,000 HOURS

OS1400LED-347V FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	805.71lx
2m	201.43lx
3m	89.52lx
4m	50.36lx
5m	32.23lx
6m	22.38lx
7m	16.44lx
8m	12.59lx
9m	9.95lx
10m	8.06lx
11m	6.66lx
12m	5.60lx

OS1400LED-347V LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

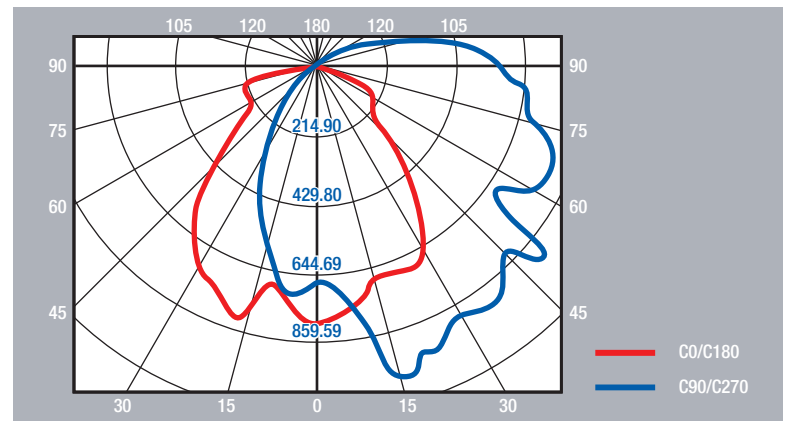

OS1400LED-347V ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	581.1	21.6
0-40	941.1	34.9
0-60	1581.4	58.7
0-90	2361.9	87.7
90-180	332.7	12.3

OS1400LED-347V ISO ILLUMINANCE DIAGRAM (UNIT: LX)

