


# SEAWOLF

MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS1500LED-CWP	5200LM	46 W	5 K	80	100,000 HOURS

## OS1500LED FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	980.60lx
2m	245.15lx
3m	108.96lx
4m	61.29lx
5m	39.22lx
6m	27.24lx
7m	20.01lx
8m	15.32lx
9m	12.11lx
10m	9.81lx
11m	8.10lx
12m	6.81lx

## OS1500LED LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

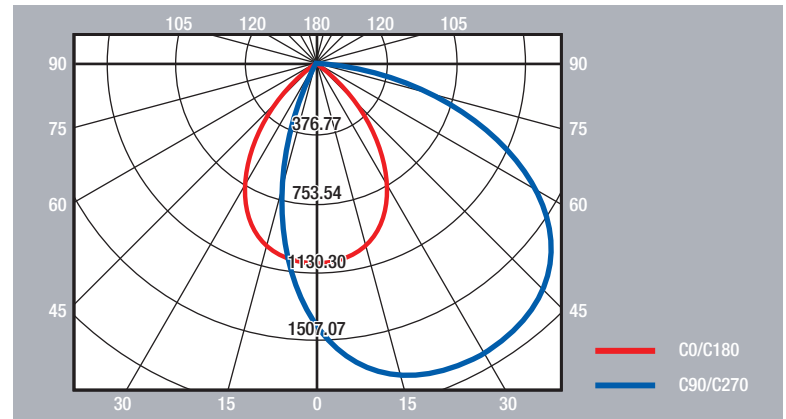

## OS1500LED ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	774.3	14.8
0-40	1276.8	24.4
0-60	2453.3	46.8
0-90	4150.4	79.2
90-180	1087.5	20.8

## OS1500LED ISO ILLUMINANCE DIAGRAM (UNIT: LX)

