


SEAWOLF

MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS1500LED-347V	5200 LM	52 W	5 K	80	100,000 HOURS

OS1500LED-347V FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	1403.12lx
2m	350.78lx
3m	155.90lx
4m	87.70lx
5m	56.12lx
6m	38.98lx
7m	28.64lx
8m	21.92lx
9m	17.32lx
10m	14.03lx
11m	11.60lx
12m	9.74lx

OS1500LED-347V LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

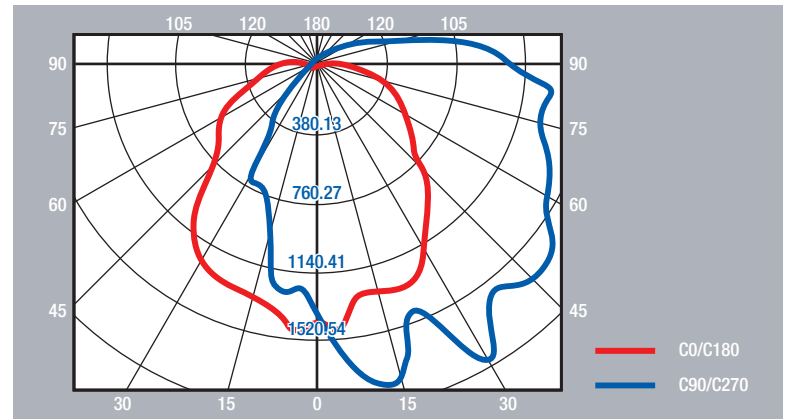

OS1500LED-347V ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	1066.9	20.7
0-40	1739	33.8
0-60	3072.4	59.7
0-90	4556	88.5
90-180	591.6	11.5

OS1500LED-347V ISO ILLUMINANCE DIAGRAM (UNIT: LX)

