


# ENTERPRISE

MODEL	LIGHT OUTPUT	WATTAGE	COLOR TEMPERATURE	CRI	LIFETIME
OS400LED	2000 LM	35 W	4 K	80	50,000 HOURS

## OS400LED FOOTCANDLE DIAGRAM

MOUNTING HEIGHT (METERS)	FOOTCANDLES AT NADIR
1m	812.87lx
2m	203.22lx
3m	90.32lx
4m	50.80lx
5m	32.51lx
6m	22.58lx
7m	16.59lx
8m	12.70lx
9m	10.04lx
10m	8.13lx
11m	6.72lx
12m	5.64lx


## OS400LED LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)

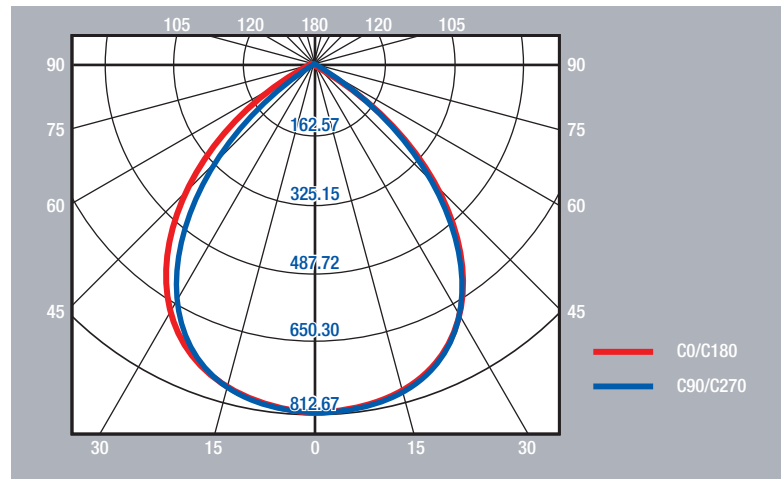

## OS400LED ZONAL LUMEN SUMMARY

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF LUMINAIRE
0-30	616.9	30
0-40	990.1	48.2
0-60	1647.9	80.2
0-90	2031.7	98.8
90-180	24.2	1.2

## OS400LED ISO ILLUMINANCE DIAGRAM (UNIT: LX)

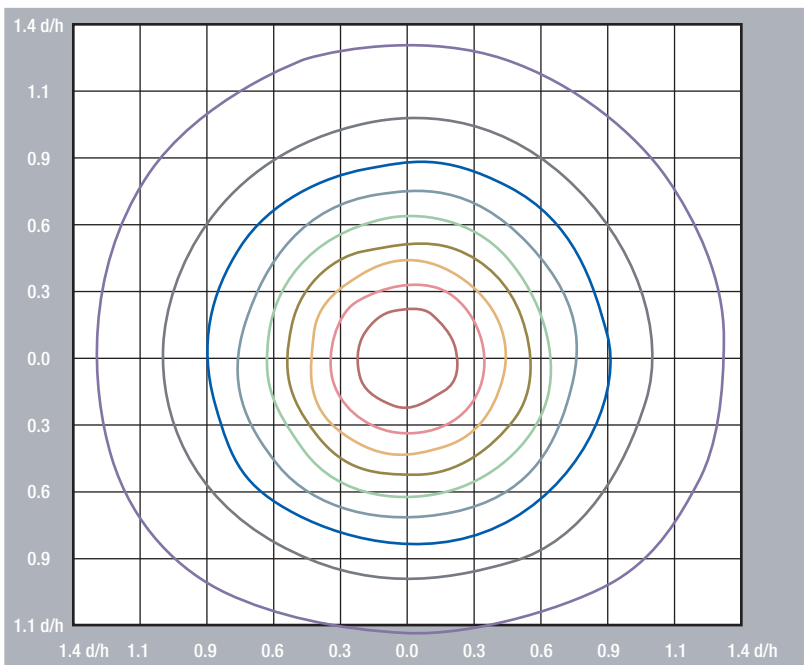

- (10%Emax) 1.002901
- (20%Emax) 2.005802
- (30%Emax) 3.008704
- (40%Emax) 4.011605
- (50%Emax) 5.014506
- (60%Emax) 6.017407
- (70%Emax) 7.020309
- (80%Emax) 8.02321
- (90%Emax) 9.026111