


ENTERPRISE

MODÈLE	FLUX LUMINEUX	WATTAGE	TEMPÉRATURE DE COULEUR	CRI	DURÉE DE VIE
OS400LED	2000 LM	35 W	4 K	80	50 000 HEURES

OS400LED CÔNE LUMINEUX


HAUTEUR DE MONTAGE (MÈTRES)	PIEDS-BOUGIES AU NADIR
1m	812.87lx
2m	203.22lx
3m	90.32lx
4m	50.80lx
5m	32.51lx
6m	22.58lx
7m	16.59lx
8m	12.70lx
9m	10.04lx
10m	8.13lx
11m	6.72lx
12m	5.64lx

OS400LED DIAGRAMME D'ÉCLAIREMENT ISO (UNITÉ: LX)

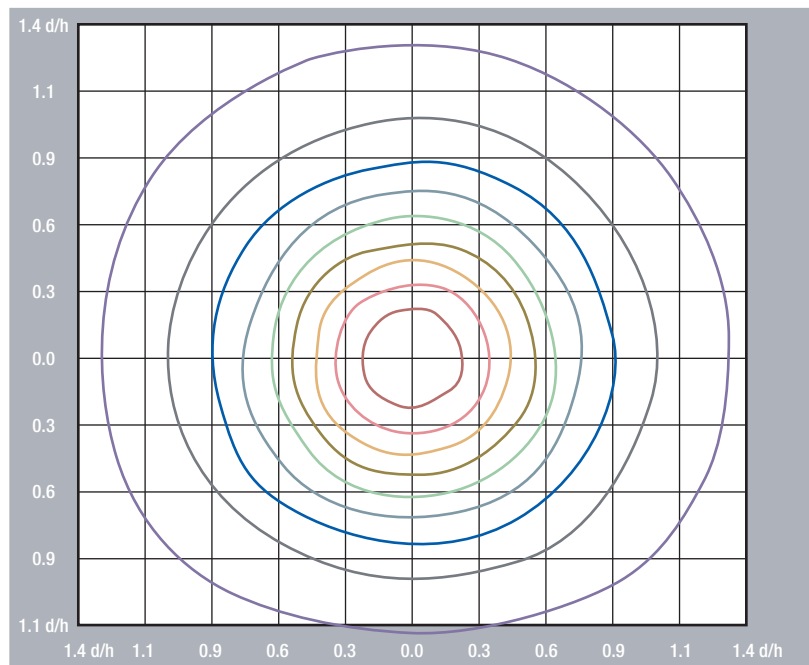

—	(10%Emax) 1.002901
—	(20%Emax) 2.005802
—	(30%Emax) 3.008704
—	(40%Emax) 4.011605
—	(50%Emax) 5.014506
—	(60%Emax) 6.017407
—	(70%Emax) 7.020309
—	(80%Emax) 8.02321
—	(90%Emax) 9.026111

OS400LED DISTRIBUTION DE L'INTENSITÉ LUMINEUSE POLAIRE

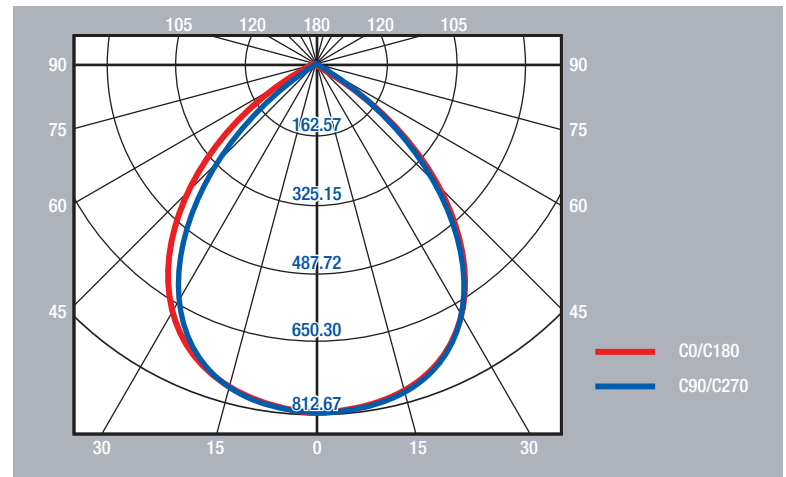

OS400LED FLUX LUMINEUX ZONAL

FLUX LUMINEUX ZONAL		
ZONE	LUMENS	% LUMINAIRE
0-30	616.9	30
0-40	990.1	48.2
0-60	1647.9	80.2
0-90	2031.7	98.8
90-180	24.2	1.2