

SERIES APEX | LED HIGH PERFORMANCE RECESSED DOWNLIGHT

HIGH PERFORMANCE LED


Integrated LED technology offers low-energy, long lasting performance with outstanding light outputs up to 4000 lumens.

DIE-CAST BODY

Die-cast aluminum construction in 3", 4", 6", 8" and 10" trim sizes. Designed to replace existing CFL/PL fluorescent fixtures or for new construction applications.

PRESSURE-FIT CLIP SYSTEM

Pressure-fit spring clips for ease of install.

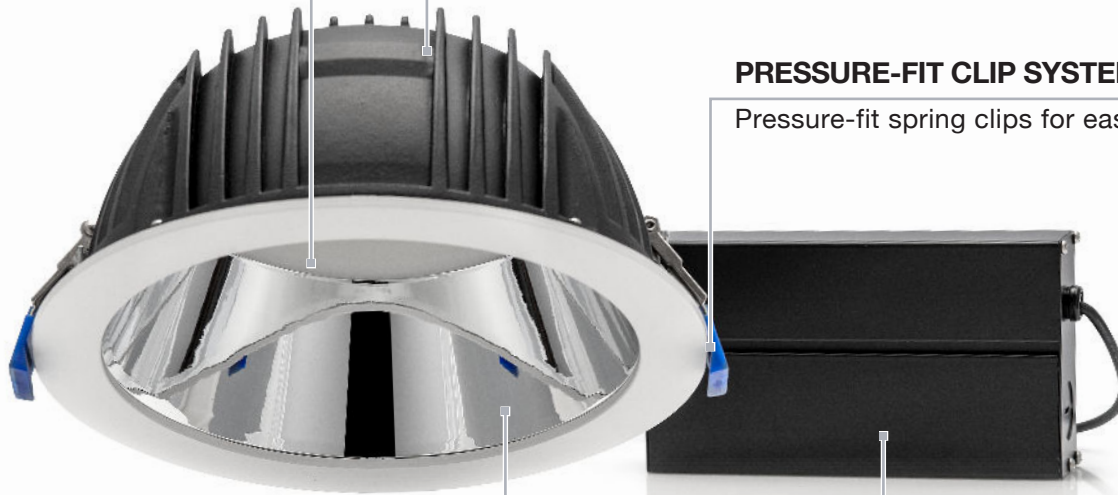

GENERAL FLOOD REFLECTOR

High quality polycarbonate 80 degree reflector designed for maximum reflection efficiency. Deep regressed diffuser to eliminate the glare from the high powered LED. Available with white or chrome reflector.

INTEGRATED DRIVER

Aluminum junction box with integrated dimming driver and Quick Connect wire connectors for easy connection.



DIMMABLE 0-10V



DAMP LOCATIONS

IC

RATED



5 years limited warranty.

Also available: 120V line voltage driver - dimmable.
347V line voltage driver - dimmable (6" & 8" only).

NOMINAL SIZE	MODEL	LIGHT OUTPUT	WATTAGE / VOLTAGE	LUMINAIRE DIMENSIONS	JUNCTION BOX DIMENSIONS
3"	APX-310	600 LM	9 W / 120-277 V	4 1/8" Dia X 2 3/8" H	4 3/4" x 2 5/8" x 2"
4"	APX-410	870 LM	12 W / 120-277V	6" Dia X 2 5/8" H	
6"	APX-610	1660 LM	20 W / 120-277V	8 1/8" Dia X 3 1/2" H	6 1/2" x 3 3/4" x 3 1/2"
8"	APX-810	2630 LM	30 W / 120-277V	9 7/8" Dia X 4" H	
10"	APX-1010	4000 LM	40 W / 120-277V	11" Dia X 4 1/2" H	4 3/4" x 3 1/8" x 3 1/8"
COLOR TEMPERATURE		CRI	REFLECTOR ANGLE	LIFETIME	AVAILABLE FINISH
3000K, 4000K, 5000K		80+	60°	45,000 HOURS	WHITE & WHITE CHROME