

600 SERIES PINNACLE

LED SPECIFICATION GRADE 24V TAPE LIGHT

NDR Pinnacle **600 Series** LED Tape Light offers industry specification grade technology and is well suited in applications which are exposed to moisture. It features a thin **Nano-Skin** coating technology giving this product a durable protective layer and an IP54 damp location rating.

To ensure that our CRI>94 color rendering and our high output lumen package of greater than 550LM/ft are always maintained, all our LEDs are selected using the 3-Step MacAdam binning criteria. This stringent protocol step ensures uniformity in both color and light intensity consistently across the entire run of lighting installed.

Applications may include:

Indoor: kitchen cabinets, bathroom vanities, large coves, hallways, architectural designs.

Outdoor: covered gazebos, roofed patios or any protected areas not exposed to direct contact with water.

FEATURES

- Full range dimmability
- 3oz Copper per sq. ft. – Specification Grade
 - Thicker layer offers less electrical resistance and voltage drops
- 3-Step MacAdam LED binning
- Cuttable every 2.8”
- Maximum run – 16.4ft (5m)
- 3M™ mounting tape
- IP54 rated – Damp location

FIELD CUTTABLE


Can be cut every 2.8”

NANO-SKIN TECHNOLOGY

IP54 rated for damp locations

DOUBLE LAYER COPPER FOIL

3oz pure copper for superior thermal management and lower voltage drop

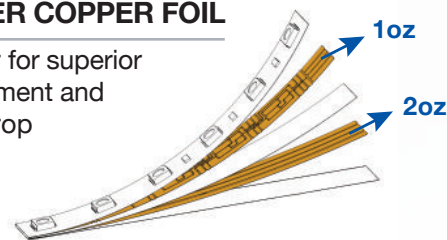

MODEL	WATTS / FT	LM / FT	WATTS / M	LM / M	CRI	REEL SIZE	IP RATING	LIFETIME	LIMITED WARRANTY
TL600-24V-3K	5.1	563	16.8	1848	94+	16.4FT (5M)	IP54	50,000 HOURS	5 YEARS