

## TLD24V-25W

### 24V DRIVER FOR PINNACLE SERIES PUCK LIGHTS AND TAPE LIGHT



#### FEATURES

- Output constant voltage
- ETL, cETL listed, Class 2
- AC input: 100-130VAC
- High efficiency: up to 84%
- Dimming range: 5-100%
- Load: 5-100%
- Protection: short circuit/over loading/  
Over temperature
- Plastic housing, for dry or damp location
- Flicker-free
- Compatible with Forward phase, Triac, MLV  
Dimmers
- Recommended & tested driver for Pinnacle Series  
puck lights and tape light

#### SPECIFICATIONS

Model	<b>TLD24V-25W</b>	
Certificates	<b>ETL cETL Class 2 FCC</b>	
Output	DC Voltage	24V
	Rated Current	1.04A
	Rated Power	25W
	Voltage Tolerance	±0.5V
Input	Voltage Range	100-130VAC
	Frequency Range	47-63Hz
	Power Factor (Typ.) @ full load	0.65@120VAC
	Efficiency (Typ.) @ full load	84%
	AC Current (Max.)	0.9A
Protection	Leakage Current	<0.50mA
	Short Circuit	Hiccup mode, recover after fault condition is removed
	Over Loading	≤120%
Environment	Over Temperature	100°C±10°C shut down o/p voltage, automatically recover after cooling
	Working Temperature	-40~+60°C (-40~+140°F)
	Working Humidity	20~90%RH, non-condensing
	Storage Temperature & Humidity	-40~+80°C (-40~+176°F), 10~95%RH
	Temperature Coefficient	±0.03%/°C/°F (0~50°C/32~122°F)
Safety & EMC	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72min. each along X,Y,Z axes
	Safety Standards	UL8750+UL1310, CLASS 2 unit
	Withstand Voltage	I/P-O/P: 1500VAC
	Isolation Resistance	I/P-O/P:100MΩ/500VDC/25°C(77°F)/70%RH
Others	EMC Emission	FCC Part 15 B
	Net. Weight	0.5 lbs / 0.95Kg
	Size	6.1" / 155mm (L) x 2.1" / 54mm (W) x 0.8" / 20mm (H)
	Master Case	20PCS/CTN

\* All parameters if NOT specially mentioned are measured at 120VAC input, rated load and 25°C (77°F) of ambient temperature.


**TLD24V-25W**  
**24V DRIVER FOR PINNACLE SERIES**  
**PUCK LIGHTS AND TAPE LIGHT**

**APPLICATIONS**

The Pinnacle Series 24V driver has been designed for projects where low wattage or smaller runs are required. The compact size and a profile height of less than 1" allows for several discrete installation applications. It meets all requirements for Class 2 certification and is the recommended driver for use with our 24V Pinnacle Series puck lights and LED tape light. The minimum load requirements of 1.25W allows for projects requiring as little as one PL24V-WH and at the maximum load it can power up to 12 puck lights.

**DIMENSIONS**

**DRIVER**

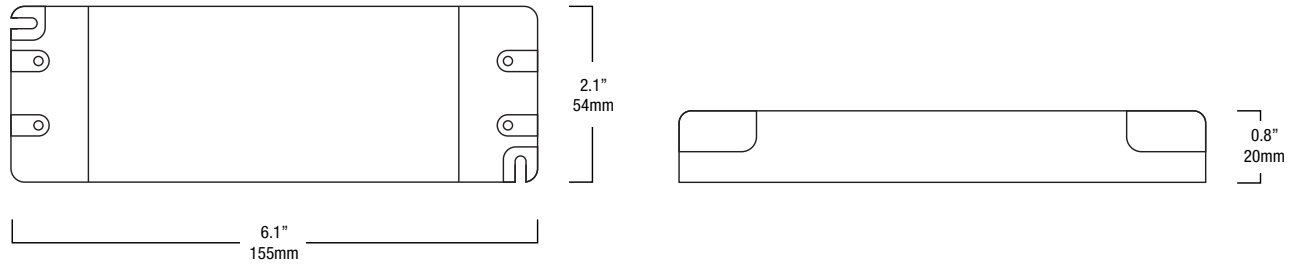

6.1" / 155mm (L) x 2.1" / 54mm (W) x 0.8" / 20mm (H)

**RATINGS**



**ORDERING GUIDE**

**Pinnacle TLD24V Series**

Series	Wattage	Input Voltage	Output Voltage
TLD24V	<b>25W</b>	100-130V AC	24V DC

Notes: Configure product using **BOLD** options: Ex: TLD24V-**25W**