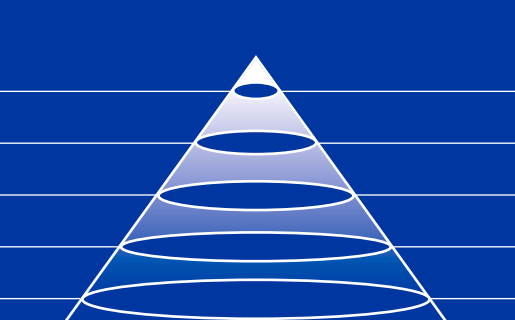


PHOTOMETRICS

Nominal size	Model	Light output	Wattage / Voltage	Selectable color temperature	CRI
8"	VTR800-CCT	6900 lm	55W / 120-347V	35K / 4K / 5K	80

FOOTCANDLE DIAGRAM

Mounting height (feet / meters)		Footcandles at Nadir	Diameter (feet / meters)
3.28' / 1m		1875.9	12.53' / 3.82m
6.56' / 2m		469	25.03' / 7.63m
9.84' / 3m		208.4	37.56' / 11.45m
13.12' / 4m		117.2	50.06' / 15.26m
16.4' / 5m		75	62.56' / 19.07m

AVERAGE LUMINANCE (cd/m²)

G/C	0	45	90
0	1838.76	1268.73	360.74
45	1838.76	1248.2	355.87
90	1838.76	1312.77	377.68
180	1838.76	1296.04	377.47
270	1838.76	1364.63	392.71
360	1838.76	1268.73	360.74

ZONAL LUMEN SUMMARY

Zone	Lumens	% of luminaire
0-40	2366.05	33.94
0-60	4327.71	62.09
0-90	6342.58	90.99
90-180	627.86	9.01

DISTRIBUTION CURVE (cd/klm)

