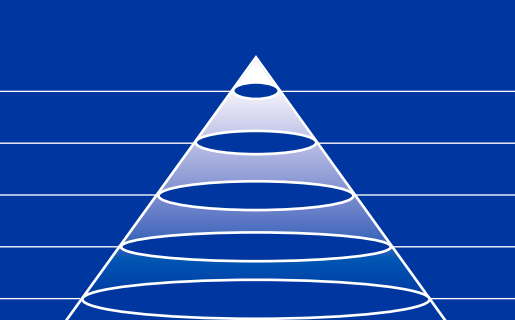


PHOTOMETRICS

Nominal size	Model	Light output	Wattage / Voltage	Selectable color temperature	CRI
5"	VTR500-CCT	3900 lm	32W / 120-347V	35K / 4K / 5K	80

FOOTCANDLE DIAGRAM

Mounting height (feet / meters)		Footcandles at Nadir	Diameter (feet / meters)
3.28' / 1m		1075	12.34' / 3.76m
6.56' / 2m		268.7	24.64' / 7.51m
9.84' / 3m		119.4	37.08' / 11.3m
13.12' / 4m		67.2	49.28' / 15.02m
16.4' / 5m		43	61.68' / 18.8m

AVERAGE LUMINANCE (cd/m²)

G/C	0	45	90
0	1041.86	726.28	210.47
45	1041.86	735.57	206.58
90	1041.86	783.76	217.39
180	1041.86	730.82	208.74
270	1041.86	756.75	204.64
360	1041.86	726.28	210.47

ZONAL LUMEN SUMMARY

Zone	Lumens	% of luminaire
0-40	1348.39	34.23
0-60	2464.81	62.57
0-90	3592.19	91.18
90-180	347.34	8.82

DISTRIBUTION CURVE (cd/klm)

