


PINNACLE SERIES







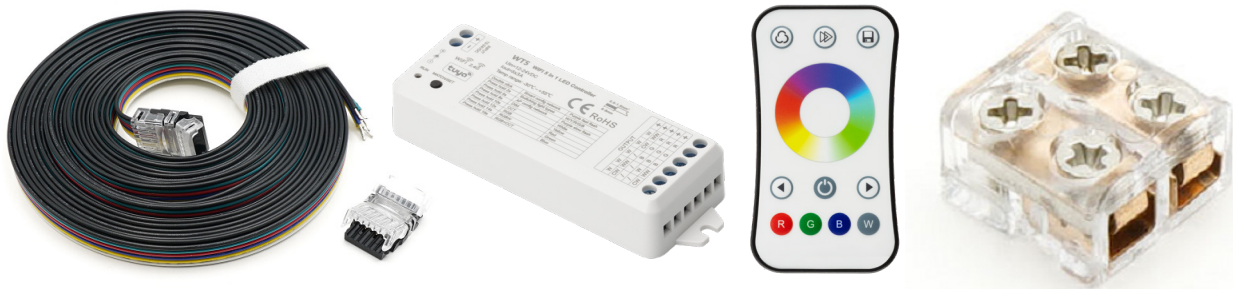


ACCESSORIES & DRIVERS MATRIX SHEETS



PINNACLE SERIES

ACCESSORIES



















MATRIX SHEET

	ACCESSORY		TL350	TL600	TL250	TL360
TECHNICAL SPECIFICATIONS	Watts/foot		2.9 W/ft.	5.1 W/ft.	2.9 W/ft.	4.6 W/ft.
	Lumens/foot		322 lm/ft.	563 lm/ft.	236 lm/ft.	388 lm/ft.
	Reel size		16.4 ft 5 m	16.4 ft 5 m	32.8 ft 10 m	16.4 ft 5 m
	Max run		26.2 ft 8 m 76 W	16.4 ft 5 m 84 W	32.8 ft 10 m 96 W	16.4 ft 5 m 75 W
2-PIN SNAP CONNECTORS	TL-CCT-2-10		•	•	•	
	TL-CJOIN6-2-10		•	•	•	
	TL-CTW6-2-10		•	•	•	
2-PIN SCREW CONNECTORS	TL-STT-2-10		•	•	•	•
	TL-STB-2-10		•	•	•	•
	TL-STW8-2-10		•	•	•	•
	TL-SJOIN-2-10		•	•	•	•
	TL-SLTT-2-10		•	•	•	•
	TL-EXT6FT-2-10		•	•	•	•

PINNACLE SERIES

ACCESSORIES

MATRIX SHEET

	ACCESSORY		TL200	TL150	TL260	TL400
TECHNICAL SPECIFICATIONS	Watts/foot		3.7 W/ft.	4.6 W/ft.	3 W/ft.	4.5 W/ft.
	Lumens/foot		198 lm/ft.	138 lm/ft.	272 lm/ft.	414 lm/ft.
	Reel size		16.4 ft 5 m	16.4 ft 5 m	16.4 ft 5 m	100 ft 30.5 m
	Max run		16.4 ft 5 m 60 W	16.4 ft 5 m 75 W	16.4 ft 5 m 49 W	100 ft 30.5 m 450 W
6-PIN SCREW CONNECTORS	TL-CTT-6-12		●			
	TL-CTW6-6-12		●			
	TL-CJOIN6-6-12		●			
	TL-EXT-20FT-6-12		●			
RGBW NEONFLEX CONNECTORS	TL-EC24V-1515			●		
	TL-WL6-1515			●		
	TL-JOIN6-1515			●		
	TL-CLIP-1515			●		
2-PIN WET LOCATIONS CONNECTORS	TL-EC-COB67				●	
	TL-WL6FT-COB67				●	
	TL-JOIN12-COB67				●	
	TL-CLIP-COB67				●	
CONTROLLER & REMOTES	TL-RGB-CTRL		●			
	TL-WIFI-CTRL		●	●		
	TL-RGBW-RMT			●		
	TL-RGBCCT-MRT		●			
120V ACCESSORIES	TL-CLIP-120V					●
	TL-EC-120V					●

PINNACLE SERIES

24V DRIVERS

MATRIX SHEET

DRIVER		TL350	TL600	TL250	TL360	TL200	TL150	TL260	PL24V CCT	
TECHNICAL SPECIFICATIONS	Watts/foot	2.9 W/ft.	5.1 W/ft.	2.9 W/ft.	4.6 W/ft.	3.7 W/ft.	4.6 W/ft.	3 W/ft.	3.5 W/ft.	
	Lumens/foot	322 lm/ft.	563 lm/ft.	236 lm/ft.	388 lm/ft.	198 lm/ft.	138 lm/ft.	272 lm/ft.	120 lm/ft.	
	Reel size	16.4 ft 5 m	16.4 ft 5 m	32.8 ft 10 m	16.4 ft 5 m	16.4 ft 5 m	16.4 ft 5 m	16.4 ft 5 m		
	Max run	26.2 ft 8 m 76 W	16.4 ft 5 m 84 W	32.8 ft 10 m 96 W	16.4 ft 5 m 75 W	16.4 ft 5 m 60 W	16.4 ft 5 m 60 W	16.4 ft 5 m 60 W		
DRIVERS MAXIMUM LENGTH	TLD24V-25W		8.6 ft 2.6 m	4.9 ft 1.5 m	8.6 ft 2.6 m	5.4 ft 1.6 m	6.7 ft 2 m	5.4 ft 1.6 m	8.3 ft 2.5 m	7 puck lights
	TLD24V-30W		10 ft 3 m	5.8 ft 1.7 m	10 ft 3 m	6.5 ft 2 m	8.1 ft 2.5 m	6.5 ft 2 m	10 ft 3 m	8 puck lights
	TLD24V-60W		20 ft 6.1 m	11.7 ft 3.5 m	20 ft 6.1 m	13 ft 4 m	16.2 ft 4.9 m	13 ft 3.9 m	20 ft 6 m	17 puck lights
	TLD24V-96W		33 ft 10 m	18.8 ft 5.7 m	33 ft 10 m	20 ft 6 m	25.9 ft 7.8 m	20 ft 6 m	32 ft 9.7 m	
	TLD24V-192W		66.2 ft 20.1 m	37.6 ft 11.5 m	66.2 ft 20.1 m	41.7 ft 12.7 m	51.9 ft 15.8 m	41.7 ft 12.7 m	64 ft 19.5 m	
	TLD24V-288W		99.3 ft 30.3 m	56.5 ft 17.2 m	99.3 ft 30.3 m	62.6 ft 19 m	77.8 ft 23.7 m	62.6 ft 19 m	96 ft 29.2 m	
	TLD24V-MINI-60W		20 ft 6.1 m	11.7 ft 3.5 m	20 ft 6.1 m	13 ft 4 m	16.2 ft 4.9 m	13 ft 3.9 m	20 ft 6 m	17 puck lights
	TLDDIM-24V-100W		33.4 ft 10.4 m	19.6 ft 5.9 m	34.4 ft 10.4 m	21.7 ft 6.6 m	27 ft 8.2 m	21.7 ft 6.6 m	33 ft 10 m	