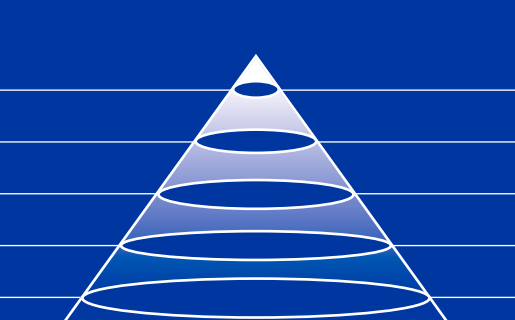


PHOTOMETRICS

Nominal size	Model	Light output	Wattage / Voltage	Selectable color temperature	CRI
7"	ASP70-CCT	1000 lm	15W / 120V	27K/3K/35K/4K/5K	90

FOOTCANDLE DIAGRAM

Mounting height (feet / meters)		Footcandles at Nadir	Diameter (feet / meters)
4' / 1.22m		20.24	17.39' / 5.3m
6' / 1.83m		8.99	26.09' / 7.9m
8' / 2.44m		5.06	34.79' / 10.6m
10' / 3.05m		3.24	43.48' / 13.3m
12' / 3.66m		2.25	52.18' / 15.9m

AVERAGE LUMINANCE (cd/m²)

G/C	0	45	90
0	20446.1	20446.1	20446.1
45	25249.4	25215.9	25240.5
55	25826.8	25931.4	25788.2
65	24578.3	24682.8	24660.4
75	21445.0	21670.7	21615.8
85	14707.3	15377.5	15830.3

ZONAL LUMEN SUMMARY

Zone	Lumens	% of luminaire
0-40	460.8	39.42
0-60	888.1	75.97
0-90	1169	100
90-180	1169	100

DISTRIBUTION CURVE (cd/klm)

