

# PINNACLE

Diffuser kits for Pinnacle Series Tape Light

## TL-CKIT2

SPECIFICATIONS SHEET



### SPECIFICATIONS

#### Housing

Aluminum extruded channels with silver anodized finish for a smooth finish that will prevent rusting/corrosion and offer a good heat dissipation to keep the LED tape light cool.

#### Optics

Polycarbonate lens with frosted finish to provide an evenly diffused illumination throughout the installation.

#### Kit Contents

The diffuser kit is packed to pair perfect with 1x 16.4FT (5m) reel of NDR Pinnacle Series 24V tape light items.

Each diffuser kit includes (5) packs of:  
1x aluminum channel cut to 39.37" (1m)  
1x polycarbonate lens cut to 39.37" (1m)  
2x plastic end caps (1 end cap sealed and 1 end cap with hole)  
3x spring steel mounting clips + screws for mounting

Total contents of each diffuser kit:  
16.4ft (5m) of aluminum channel  
16.4ft (5m) of polycarbonate lens  
10 plastic end caps (5x sealed + 5x with wire hole)  
15 spring steel mounting clips + screws for mounting

#### Installation

Suited to fit all NDR Pinnacle Series 24V tape light models - ideal for any surface or recessed mount installations. Spring steel mounting clips for easy installation and suited for any dry or damp location applications.


\*TL-CKIT2 is recommended for installations using the TL200-RGB-24V reels and accessories.

Extrusions length	<b>39" (1m)</b>
Extrusions width	<b>0.94" (24mm)</b>
Extrusions height	<b>0.43" (11mm)</b>
Number of extrusions	<b>5 units</b>
Number of caps	<b>5 pairs</b>
Number of clips	<b>15 clips &amp; screws</b>
Finishes	<b>Silver</b>

FINISHES



DIMENSIONS

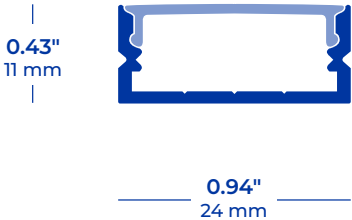

ORDERING GUIDE

Séries	Finishes
TL-CKIT2	SV Silver

Note: Configure product using **BOLD** options. Ex.: **TL-CKIT2-SV**