

# FLOODLIGHT

Premium High-Performance LED Floodlight

FLP-60W

SPECIFICATION SHEET



## SPECIFICATIONS



### Housing details

Diecast aluminum, corrosion-resistant housing with dark-bronze powder paint for lasting durability.

Fixture is fully sealed to keep out moisture and dirt (IP66).

Adjustable Beam Angle (5x5, 6x6, 7x6).

Adjustable Photocell (ON/OFF)

Adjustable Wattage (30W, 40W, 50W, 60W)

3CCT Selectable (3K,4K,5K)

### Installation

Hardware included

Adjustable knuckle and adjustable beam angle allow for precise light aiming.

Wet location listed (IP66) for outdoor installations.

Can be mounted to a junction box or on a wall.

### Electrical

Easily connected to a 120-277V power supply. 0-10V dimmable.

Selectable Color Temperature (3000K, 4000K, 5000K)

Rated for outdoor installations, -20°C (4°F) minimum starting ambient temperature.

**Listings:** This product is UL/cUL listed to U.S. and Canadian safety standards for wet locations.

DLC Premium Listed

Selectable color temperature	<b>3K / 4K / 5K</b>
Lumen output	<b>4500 lumens 6000 lumens 7500 lumens 9000 lumens</b>
Wattage	<b>30W 40W 50W 60W</b>
Voltage	<b>120 – 277V</b>
CRI	<b>80</b>
IP rating	<b>IP66</b>
Beam Angle Selectability	<b>NEMA 5x5, 6x6, 7x6</b>
Photocell	<b>ON / OFF</b>
LED life	<b>50,000 hours</b>
Warranty	<b>5 years</b>

### Mounting Options

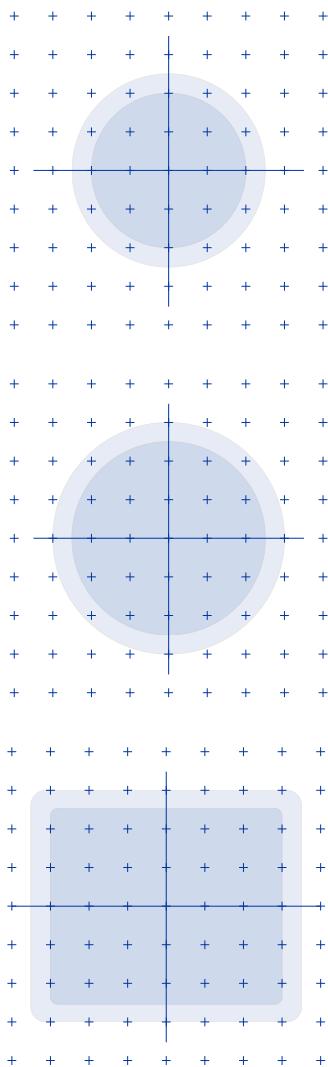
Easily mounted to a junction box using the already-installed Knuckle

Mount or to a wall using the provided Trunnion mount.

## FINISHES



## BEAM ANGLE OPTIONS



### NEMA 5x5

A medium-sized, evenly distributed beam of light ideal for facades, under canopies, signage, walkways and general landscape applications.

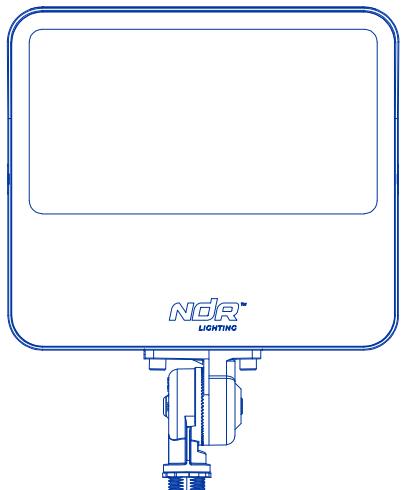


### NEMA 6x6

A wide, evenly distributed beam of light ideal for applications with a shorter setback. Large facades, signage, recreational sports park, parking lots, and commercial applications for general area lighting applications.

### NEMA 7x6

A very wide horizontal coverage beam of light ideal for large parking lots, large yards/staging areas, perimeter and security lighting ideal for maximum light spread. Excellent for spacing fixtures further apart and wider coverage without hot spots directly under a pole mount.

## DIMENSIONS

8.875"  
226.5 mm11.125"  
283 mm2.125"  
53 mmALTERNATE  
MOUNTING  
(INCLUDED)

## APPLICATIONS

Our Premium LED Floodlight Series offers security and general lighting for outdoor residential and commercial applications. Their industry-leading electronic adjustable beam angle, powerful lumen output, 4 selectable wattage options, 3CCT selectable color temperature, and a night & day photocell option with an ON/OFF switch proves ideal for building facades, driveways, walkways, lots, and loading areas.

## RATINGS &amp; CERTIFICATIONS

Wet locations  
rated

Dimmable

## ORDERING GUIDE

Series	Color temperature	CRI	Wattage	Finish
FLP-60W	3CCT 3000K / 4000K / 5000K	80	60W	DB Dark Bronze

Note: Configure product using **BOLD** options: Ex: **FLP-60W**